



EnduraLED Bulkhead

WT202W LED10S CW PSU S3 PC

EnduraLED Bulkhead luminaire is a sustainable and reliable offering for indoor or semi-outdoor public area with IP66 ingress protection. The product offers two lumen packs with two different CCT's and suitable for versatile applications such as staircases, industrial areas, circulation areas, lift wells etc. Pressure die cast housing and high impact resistance polycarbonate cover make this bulkhead maintenance free solution for heavy duty industries.

Product data

General Information	
Beam angle of light source	120 °
Light source color	865 cool daylight
Driver included	Yes
Optic type	120 [Beam angle 120°]
Optical cover/lens type	Polycarbonate
Luminaire light beam spread	120°
Control interface	-
Protection class IEC	Safety class I (I)
Flammability mark	F [For mounting on normally flammable surfaces]
Warranty period	2 years
Material	Aluminum
Light source engine type	LED
Operating and Electrical	
Input Voltage	140-270 V
Input Frequency	50 Hz
Power Factor (Min)	0.95

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Housing Material	Aluminum die-cast
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Mounting device	MBW [Wall-mounting bracket]
Color	Gray
Approval and Application	
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK09 [10 J]
Surge Protection (Common/Differential)	Surge protection level until 2.5 kV

Initial Performance (IEC Compliant)	
Initial luminous flux (system flux)	1100 lm
Initial LED luminaire efficacy	110 lm/W
Init. Corr. Color Temperature	6500 K
Init. Color Rendering Index	>80
Initial chromaticity	<5

EnduraLED Bulkhead


Initial input power	10 W
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Median useful life L70B50	50000 h
Application Conditions	
Ambient temperature range	0 to +45 °C
Product Data	
Order product name	WT202W LED10S CW PSU S3 PC

Order code	919515813250
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	919515813250
Net Weight (Piece)	0.550 kg



Warnings and Safety

Dimensional drawing

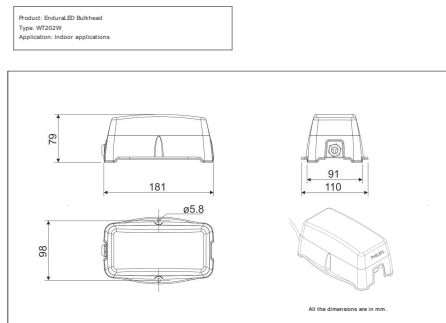

Indoor Luminaires

